


SECTION A-A

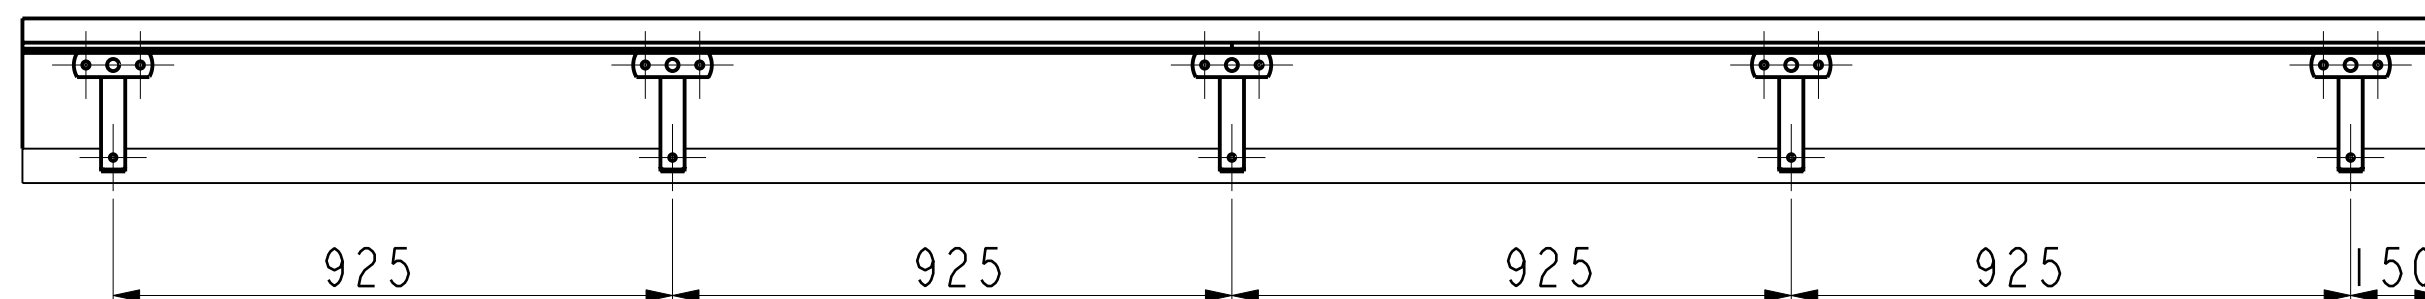

10 mm termotag i opal

		FRIMÅLTOLERANCER DS 2075 - DIN 7168																
		For mål uden toleranceangivelser gælder den afkrydsede række																
										korteste ben								
		linjre	over	0	6	30	120	315	1000	2000	4000	vinke	over	0	10	50	120	
		mål	til	6	30	120	315	1000	2000	4000	mål	til	10	50	120			
		middel	+/-	.1	.2	.3	.5	.8	1.2	2.0	4.0	middel	+/-	1°	2°	3°	10°	
		grov	+/-	.2	.5	.8	1.2	2.0	3.0	4.0	6.0	middel	+/-	1°	2°	3°	10°	
		m. grov	+/-	.5	1.0	1.5	2.0	3.0	4.0	6.0	6.0	m. grov	+/-	1°	2°	3°	30°	
DATO	SIGN.	RETTELSE	UBEN. REJFN.:															
EMNEVEGT(kg):				UBEN. OVERFL.:	SCANDINAVIAN STEELHOUSE													
MAT. VARENR.:				UBEN. RADIER:	WWW.BALKON.DK													
MAT. DIMENSION:				UBEN. SVEJSN:	MÅLF: TEGN. 02-Mar-15 MOK													
MAT. KVALITET:				2:25 GODK. 02-Mar-15 JL J														
OVERFL. BEH.:	Hot galvanize			REVISION NR.: 1.2+														
				Kurvet Steelhouse baldakin														
				4000x1000, H=250														
				776026														